

# 800 HYDROSORB®

For Water Detection & Particulate Removal



**Cim-Tek® Filtration**

# PETROLEUM


## MODEL: 800HS

### Application

- Water detection and particulate removal for commercial fueling centers
- Extended life filter for high-volume dispensing
- Compatible with gasoline, diesel, ethanol, and methanol blends up to 10%

### Design Features

- 40 gpm (151 lpm) maximum flow
- 50 psi (3.4 bar) maximum working pressure
- 10 micron and 30 micron Hydrosorb® available
- Designed to detect free water, emulsified water, and remove particulates
- Pre-Lubed Gaskets standard

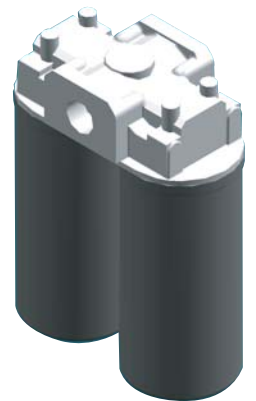

**800HS w/Dual Adaptor**

### Benefits

- Monitors storage tank water condition
- Recognized by the Underwriter's Laboratory (UL®) for use with service station pumps and dispensers
- Decreased filter change-outs
- Ease of installation Pre-Lubed Gaskets