

Lube Transfer



- Ready to use right out of the box
- For low pressure, medium to fast flow rate applications
- For conveniently dispensing oil from drums, barrels and totes
- Can also be used for evacuating waste oil

LP Kit

Flow	18 or 36 gpm
Pressure	50 psi



- Pump only
- For medium pressure, medium/high flow rate applications
- For refilling large reservoirs or drums
- Faster flow rates when time is of the essence

LP Bulk Transfer

Flow	18 or 36 gpm
Pressure	200 psi

The Fill-Rite LP Series pumps are available in a variety of models for virtually any lube transfer pump need.



Shown with side-mount flange



- Turns on/off automatically with pressure switch
- For high pressure, low flow rate applications
- For hassle-free dispensing of fluids at lube shops
- Ideal for applications where the pump is not located near the dispensing nozzle

LP On-Demand

Flow	10 gpm
Pressure	450 or 650 psi

FILL-RITE®




8825 Aviation Drive
Fort Wayne, Indiana USA 46809
Tel 260 747-7524 Fax 260 747-3159
www.tuthill.com

FEATURES	LP KIT			LP BULK TRANSFER		LP ON-DEMAND	
	LP50P18Q115	LP50P36Q115	LP50P18Q12	LP200P18Q	LP200P36Q	LP450P10Q	LP650P10Q
Quarts per Minute (QPM)	18	36	18	18	36	10	10
UL/CSA Listed Motor	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Horsepower Rating	1/3 HP	1 HP	1/2 HP	1 HP	2 HP	1 HP	1 1/2 HP
Current Draw	5.2 Amps	12 Amps	39 Amps	12/6.2 Amps	18/9.1 Amps	12/6.2 Amps	16/7.8 Amps
On/Off Switch	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Voltage	115VAC	115VAC	12VDC	115/230VAC	115/230VAC	115/230VAC	115/230VAC
Bypass Valve	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Maximum Outlet Pressure	50 psi (3.4bar)	50 psi (3.4bar)	50 psi (3.4bar)	200 psi (13.8bar)	200 psi (13.8bar)	450 psi (31bar)	650 psi (44.8bar)
Pump Inlet Size	1" NPT	1" NPT	1" NPT	1" NPT	1" NPT	1" NPT	1" NPT
Pump Outlet Size	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
Self Priming Positive Displacement Pump	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Weather Resistant Motor	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Heavy Duty Cast Iron Pump Housing	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Nozzle Boot	Yes	Yes	Yes	-	-	-	-
Outlet Check Valve w/Thermal Relief	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Tank Mount	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Side Mount	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Non-Pulsating Flow for Improved Meter Accuracy	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Pressure Sensing System Automatically Turns Pump On/Off When Control Valve is Open or Closed	-	-	-	-	-	Yes	Yes
Easy Access Screen for Simple Maintenance	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Power Cord	36" (91cm) - 3 Prong	36" (91cm) - 3 Prong	-	-	-	-	-
Suction Pipe Assembly	Included	Included	Included	-	-	-	-
Manual Nozzle	Included	Included	Included	-	-	-	-
3/4" (19mm) Hose	8' (2.4m)	8' (2.4m)	8' (2.4m)	-	-	-	-
Quick-Detach Coupler for Quick Transfer Between Tanks	Included	Included	Included	Included	Included	Included	Included

ACCESSORIES



8' (2.4m) Discharge Hose (for LP Kit Pumps only)
Part # HA08034

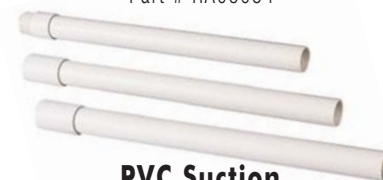

PVC Suction Pipe Assembly
Part # 1200KTG7743



Quick-Detach Coupler
Part # LP50H0027



Nozzle (for LP Kit Pumps only)
Part # 6U075



8825 Aviation Drive
Fort Wayne, Indiana USA 46809
Tel 260 747-7524 Fax 260 747-3159
www.tuthill.com