


2"

## MANUAL OR POWER REWIND REELS


To handle single 1-1/2" or 2" I.D. hose.

- Gear-driven crank rewind, or chain and sprocket drive powered by an electric, hydraulic or compressed air motor.
- Optional auxiliary crank rewind for power reels.
- Crank rewind reels supplied with pinion brake and power rewind reels with a comet brake.
- 90° ball bearing swivel joint with 2-1/2" victaulic.
- Flanged riser with 2" female NPT threads.
- Other sizes and/or threads can be furnished and must be specified.
- Standard inlet, riser, hub assembly are aluminum for jet fuels.
- Stainless steel, at extra cost.
- Rollers and roller mounting brackets are accessory items. Specify roller position.
- Pressures to 150 psi (10 bar).
- Temperatures from -20° F to +225° F (-29° C to +107° C).
- Consult factory for other pressures & temps.

- Recommended on reels with 39" diameter or larger discs, or when increased torque, and slower rewind speeds are required.
- Factory-installed.

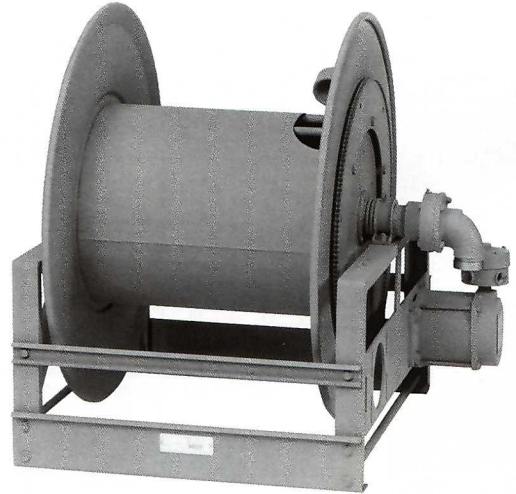

Standard Configuration Shown

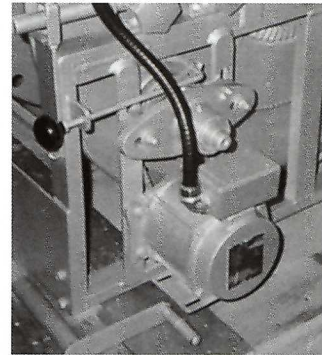

Chain Clutch - Reduction Units

