


4"

## MANUAL OR POWER REWIND REELS


To handle 3" or 4" I.D. hose.

- Rugged, industrial-duty channel frame construction.
- Gear-driven crank rewind, or chain and sprocket drive powered by an electric, hydraulic or compressed air motor.
- Pinion shaft brake as auxiliary on power reels, at extra cost.
- Crank rewind reels supplied with pinion brake, power reels with comet brake. Other brakes and locking devices may be specified.
- 90° ball bearing swivel joint with 4" female NPT threads.
- Flanged riser with 4" female NPT threads.
- Consult factory for other sizes and/or threads.
- Standard outlet riser and hub assembly are steel with iron inlet swivel joint. For jet fuels can be supplied in stainless steel, at extra cost.
- Rollers and roller mounting brackets are accessory items. Specify roller position.
- Pressures to 150 psi (10 bar)
- Temperatures from -20° F to +225° F (-29° C to +107° C).
- Consult factory for other pressures and temperatures.

- Standard on all 4" Series reels for increased torque and slower rewind speeds as required.

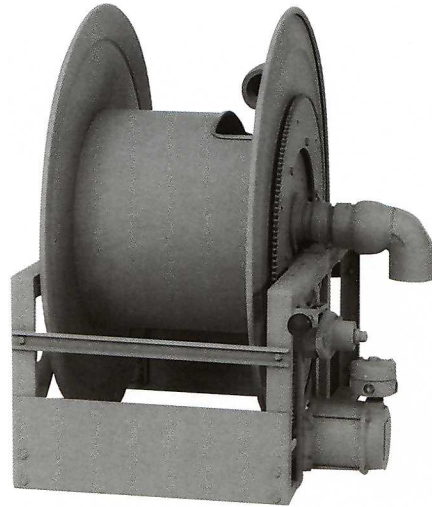

Standard Configuration Shown

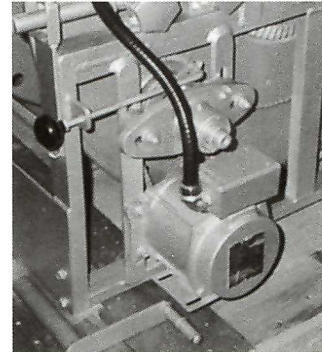

Chain Clutch - Reduction Units

