

HUSKY XS PRESSURE ACTIVATED AUTOMATIC NOZZLE

E-85 FUELING

Husky XS Nozzle:

- Pressure activated nozzle for self-service, full-service and unattended stations.
- Husky XS nozzle shuts off:
 - when the pump shuts off.
 - when the gas tank is full.
 - when the lever is opened before the pump is turned on.
 - when the leak detector has not completed its test cycle.
- Stainless Steel reinforced spout bushing keeps spout tip round, and acts as a captive fastener to prevent tip-end sensor damage.

- Compatible with unleaded and all Ethanol blends through E-100.
- Aluminum body, spout and internal parts are nickel plated to prevent contamination and corrosion from Ethanol blends.
- Nozzle equipped with unique Flo-Stop device that shuts off nozzle if it falls from fill tank or raises above the horizontal.



SPECIFYING INFORMATION

Model Number	Fuel	Hold-open Clip	Weight Lbs. (kg.)	Thread
659504	All Ethanol Blends	Yes	2.6 (1.17)	NPT

CONSTRUCTION

Body	One piece die cast aluminum w/ Electroless Nickel Plating
Disc	Fluorocarbon
Packing	Double O-ring seal protected by fiber reinforced Teflon
Lever	One piece contoured steel with hard plastic cover
Inlet	3/4" NPT


PATENTS

Patent Nos. 4,658,987 4,825,916 D301,366

U.L. Certification Pending




MADE IN THE U.S.A.

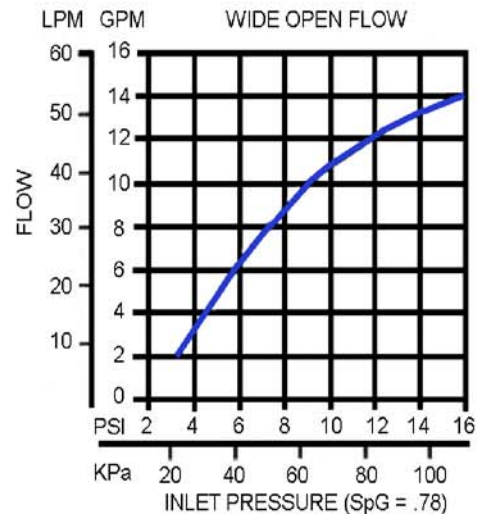

HUSKY XS PRESSURE ACTIVATED AUTOMATIC NOZZLE

E-85 FUELING

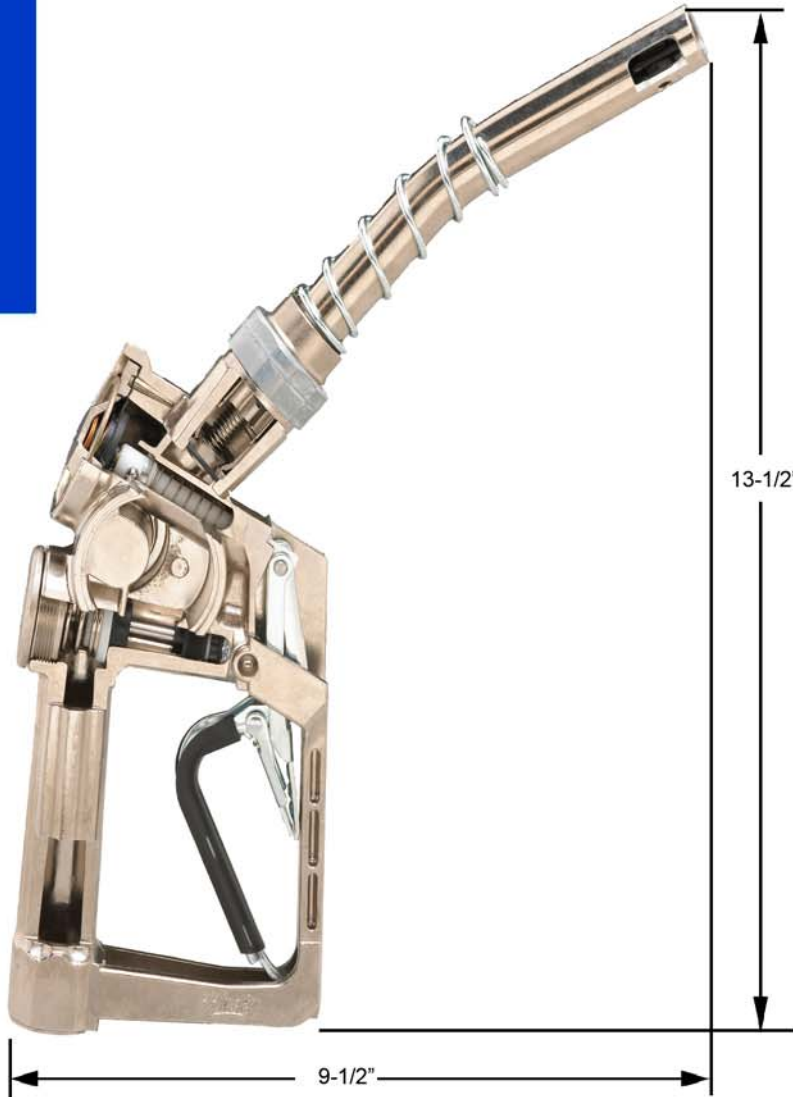

SAFE-T-BREAKS®	Model No.	Description
	6273	3/4" F X 3/4" F NPT Standard
	6360	3/4" F X 3/4" F NPT Reconnectable

SWIVELS	Model No.	Description
	6350	3/4" M X 3/4" F NPT Multi-Plane

SPOUTS	Model No.	Description
	6207	E-85 Unleaded

GUARDS	Model No.	Description
	1806	Full Grip ReGuard
	4145	Full Grip Guard
	1808	Waffle Splash Guard
	5494	Clip On Lever Cover

GUARD PACKAGES	Model No.	Description
	1809	ReGuard Package
	1506	Protection Package

