

Utility and Farm Tank Equipment

633 and 699F

Barrel Faucet

Ball Valve Type...“ball valve type” (quarter turn) brass barrel faucet. Used on barrels and small utility tanks for low pressure or gravity flow operation. Lockable with a padlock.

Fig. 633...male thread—both ends—straight style

Fig. 699F...male threaded inlet—female threaded outlet—faucet style



Fig. 633...straight style



Fig. 699F...faucet style

633 Size	Weight
1" x 1"	1.5 lbs

699F Size	Weight
¾"	1.25 lbs
1"	1.75 lbs
1" x ¾"	2.00 lbs

200

Farm /Utility Nozzle

Nozzle used for ¾" and 1" utility fueling applications (gravity or low pressure). Spouts are replaceable and available in either leaded or unleaded sizes.

Maximum working pressure 25 PSI.

Fig. 200TMC...without tube

Fig. 200BSP...1" with British Pipe Threads

Construction Details

Body...aluminum

Disc...Buna-N

Stem...brass

Stem Seal...Buna-N o-ring

Spout leaded...alum (1⁵/₁₆" OD)

Spout unleaded...alum (1³/₁₆" OD)



Fig. 200

Size	Weight
¾"	1.75 lbs
1"	1.75 lbs

474

Farm Tank Emergency Valve

Angle Type...emergency shutoff in case of fire. Male thread to tank with plunger inside tank. Angled body to female threaded outlet. Fusible link holds plunger open. 5 PSI Maximum.

Construction Details

Body...brass

Disc...Buna-N (std), Viton® or Teflon®

O-ring...Buna-N (std) or Viton®

Fusible Link...165°



Fig. 474

Size	Weight
1" x ¾"	1.0 lbs
1" x 1"	1.0 lbs

110

Quick Closing Barrel Faucet

UL listed barrel faucet with spring loaded poppeted shutoff. Used on barrels and utility tanks for low pressure (50 PSI...maximum) or gravity flow and where quick shutoff is desired.

Standard disc is Buna-N. Viton® and Teflon® are available.



Fig. 110

Size	Weight
¾"	1.25 lbs
1"	2.25 lbs
1¼" (not UL listed)	3.25 lbs

779/780 Series

Relief Cap and Arrestor

Cap and arrestor installed on fuel or water tanks. Arrestor protects tank contents from fire during filling. Hinged fill cap relieves at 1" or 3" W.C. pressure.

Fig. 779...anodized aluminum relief cap only

Fig. 780...anodized relief cap with flash arrester



Fig. 780

779 Size	Weight
2" NPSM (fuel)	0.5 lbs
2" NPSM (potable water)	0.5 lbs

780 Size	Weight
2" NPSM (fuel)	1.0 lbs

Construction Details

Body and Handle...aluminum (anodized)

Cover...stainless steel

Gasket...Buna-N or FDA Buna

Flash Arrester...aluminum (anodized) 0.040 perforated metal

574

Farm Tank Emergency Valve

Straight Type...

emergency shutoff closes in case of fire. Male thread to tank with plunger inside tank. Straight body with male threaded outlet. Fusible link holds plunger open. 5 PSI Maximum.

Construction Details

Body...brass

Disc...Buna-N (std), Viton® or Teflon®

O-ring...Buna-N (std) or Viton®

Fusible Link...165°

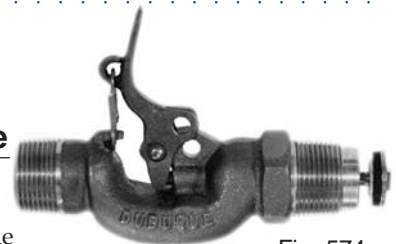


Fig. 574

Size	Weight
1" M x 1" M	1.5 lbs

87

Oil Tank Filter Valve

Used as a bottom outlet valve on residential fuel storage tanks and on farm tanks. All brass construction. ½" x ¾".



Fig. 87