

IMPORTANT: OPW products should be used in compliance with applicable federal, state, provincial, and local laws and regulations. Product selection should be based on physical specifications and limitations and compatibility with the environment and materials to be handled. OPW MAKES NO WARRANTY OF FITNESS FOR A PARTICULAR USE. All illustrations and specifications in this literature are based on the latest product information available at the time of publication. OPW reserves the right to make changes at any time in prices, materials, specifications and models and to discontinue models without notice or obligation.



OPW 1290 Automatic Shut-Off Nozzles (1290-0050 1290-0055 1290G-0050)



AUTOMATIC BULK FUELING

1290 - Automatic Shut-off for Heavy-Duty High-Flow Truck, Bus, and Home Fuel Oil Delivery. Right angle design, dual poppets, and 2-position hold open device. Available with 1 1/2" inlet (NSN 4930-01-290-0756)

1290G - 1 1/2" inlet designed to meet military specifications. Available in green anodized (1290G-0050; NSN 4930-01-352-1660) or tan anodized (1290GS-0050; NSN 4930-01-352-1661) with ground wire assembly and kamlok coupler with dust plug. 1290GS-AR50 tan anodized without kamlok coupler and dust plug also available.


Features

- **Venturi-type shut-off mechanism** – for automatic shutoff.
- **Aluminum body** – lighter in weight and easier to maneuver than other nozzles on the market.
- **Two-position hold-open device.**
- **One-hand control of hold-open mechanism** – means easy setting of flow rate.
- **Easily replaced spout** – simply remove the spout retainer nut.
- **Right angle design** – provides larger lever area for better grips and easier control, permitting the nozzle to fit into awkward spaces close to walls and into corners.
- **Built-in outlet check valve** – meets all known requirements of the Division of Measurement Standards.
- **Duel poppets** – make nozzle easy to open against high inlet pressure.
- **Design working pressure** – OPW nozzles are designed to work at 50 PSI (3.45 bar) maximum pressure.


Materials

Body: aluminum
Main stem: stainless steel
Packing: Graphite and Teflon®
Main Disc: Viton®
Inlet size: 1 ½" NPT
(also 1 ½" G threads – order 1290L)

OPW 1290



GPM

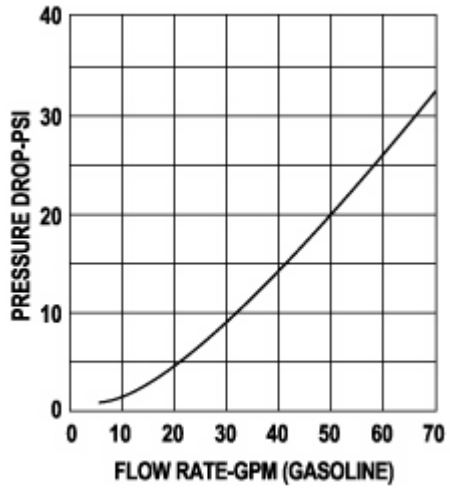

LPM

