

IMPORTANT: OPW products should be used in compliance with applicable federal, state, provincial, and local laws and regulations. Product selection should be based on physical specifications and limitations and compatibility with the environment and materials to be handled. OPW MAKES NO WARRANTY OF FITNESS FOR A PARTICULAR USE. All illustrations and specifications in this literature are based on the latest product information available at the time of publication. OPW reserves the right to make changes at any time in prices, materials, specifications and models and to discontinue models without notice or obligation.



**OPW 190 High-Flow Nozzles (190-0112 190-0113 190-0114 190-0115 190G-B104 190GW-5115)**



**190** Right angle design, dual poppets, replaceable hold-open rack. Available in 1", 1 1/4", 1 1/2" & 2" threaded inlets.

## Features & Benefits:

---

- **Aluminum body** - lighter weight, easier to maneuver.
- **Dual poppets** - allow for low flow metering (This nozzle is not intended for high pressure pump applications).
- **Replaceable Hold-Open Rack** - for use when fueling large capacity tanks. Nozzle must be attended at all times during usage.
- **Right angle design** - provides larger lever area for better grip and easier control; permits nozzle to fit into awkward spaces close to walls and into corners.
- **Drag lugs** - protect the nozzle when dragged across rough surfaces; enhances long life durability.
- **Easily replaced spout** - the spout is easily threaded into the body. Replacement spouts are readily available from OPW.
- **NPT female threads at inlet end** - standard pipe threads accept all standard 1", 1 1/4", 1 1/2" and 2" male connections.
- **Design working pressure** - OPW nozzles are designed to work at 50 PSI maximum pressure.

## Materials

Body: cast aluminum

Main Stem: stainless steel

Stem Seal: Graphite


with Teflon®

Disc: Viton®

Spout: OPW 296 brass

or 297 aluminum (optional)

## GPM

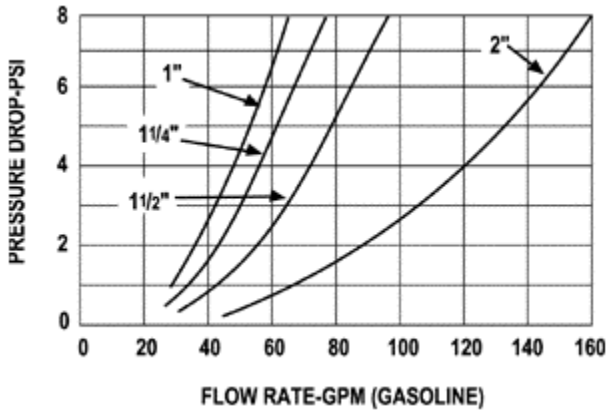

## LPM

