

IMPORTANT: OPW products should be used in compliance with applicable federal, state, provincial, and local laws and regulations. Product selection should be based on physical specifications and limitations and compatibility with the environment and materials to be handled. OPW MAKES NO WARRANTY OF FITNESS FOR A PARTICULAR USE. All illustrations and specifications in this literature are based on the latest product information available at the time of publication. OPW reserves the right to make changes at any time in prices, materials, specifications and models and to discontinue models without notice or obligation.



OPW 11AF Farm Nozzles (11AF)



For Farm Usage - Not for Commercial Usage

OPW 11AF® nozzles are designed with today's customer in mind. Small, trim, lightweight, easy and convenient, the OPW 11AF® is a rugged performer that offers long life and reliable service.

Features and Benefits

- **“Accu-Stop®” flow control** - allows your customers to top off their tanks to the exact amount...easy to stop gasoline flow precisely.
- **Low-profile aluminum body** - light-weight, easier to handle, provides an attractive, image-enhancing appearance.
- **Full hand insulator** - protects both nozzle and vehicle and insulates users’ hands.
- **Hold-open rack is standard for one-hand control** - means easy setting to flow rate for customer convenience.
- **Easily-replaced spout** - simply remove the spout-retaining screw. Replacement provides an entirely new outlet check valve. Kits are available from OPW.
- **Duratuff® lever and lever guard** - for additional durability to protect against rough handling.
- **Blocker on lever guard** - to help prevent the nozzle from being jammed into the open position with a foreign object.
- **Listed by Underwriters Laboratories, Inc.** - for gasoline, 15% ethanol, methanol and gasoline blends. UL and ULC Listed. Visit our website at: www.opw-fc.com for specific listings.
- **Exclusive two-stage lever assembly** - provides a positive shut-off, even if still being held in wide-open position by the user.
- **Design Working Pressure** - OPW products are designed to work at 50 PSI (3.45 bar) maximum pressure.

Warning

Do not use OPW 11AF®

**Nozzles for any service station application. Its intended use is for non-commercial applications only!
Use of foreign objects to hold-open automatic nozzles could result in failure to shut-off and personal injury.**

Materials

Body: aluminum

Lever & Lever Guard:

Duratuff®

Packing: Graphite with

Teflon®

Disc: Viton®

Spout: aluminum

Inlet size: 3/4"NPT

Weight: 2.85 lbs. each, 44.90 lbs./case of 15

1.3 kg each, 20.4 kg/case of 15


UL Listed




ULC Listed



GPM

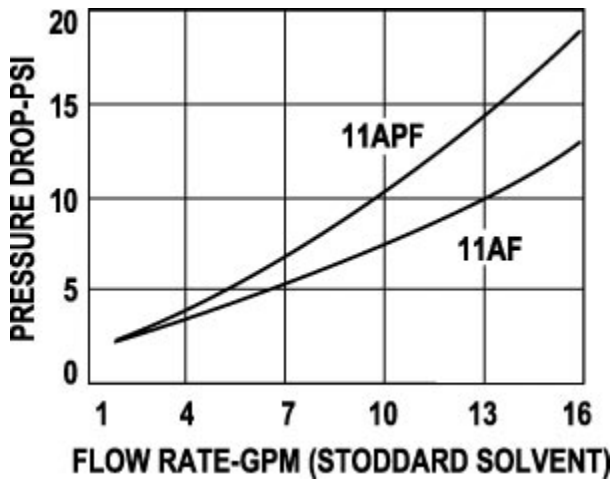

LPM

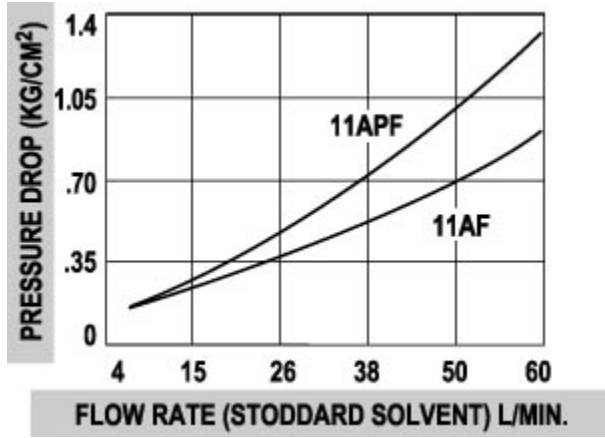

WARNING

Do not use OPW 11AF® Nozzles for any service station application. Its intended use is for non-commercial applications only! Use of foreign objects to hold-open automatic nozzles could result in failure to shut-off and personal injury.
