

# RICHARDS 920 (3/4") & T1002 (1") CONVENTIONAL BREAKAWAYS

## 3/4" & 1" Shear-Pin "Single-Use" Safe-T-Gard™ Breakaways

The 920 and the T1002 Safe-T-Gard™ breakaways help reduce or eliminate damages resulting from accidental drive away at refueling stations and truck stops. Instead of costly down time, possible hazardous fires, major spillage and dispenser damage, the 920 and T1002 disconnects in the event of a pull away with the nozzle still in the fill pipe sealing fuel flow in both directions.





Richards 920



Richards T1002

### Features:

- ◆ Listed by Underwriters Laboratories, Inc.
- ◆ Lightweight Aluminum Construction
- ◆ Attractive - Affordable
- ◆ Low Pressure Drop

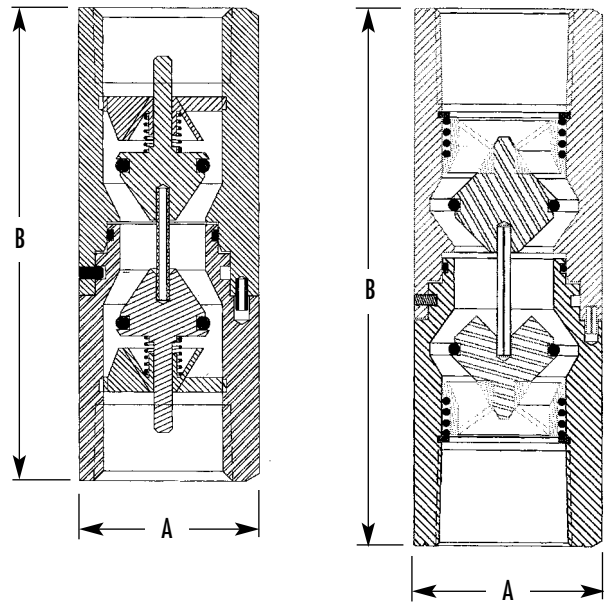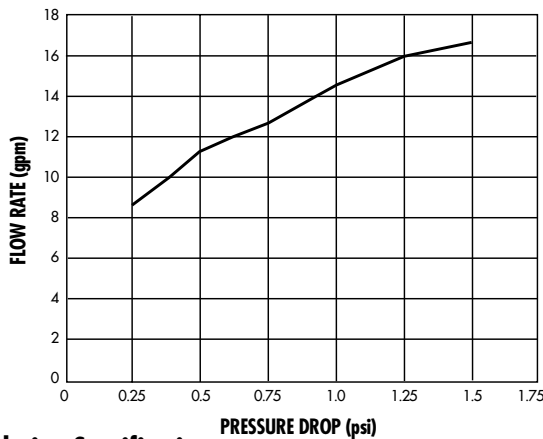

### Ordering Specifications

Part Number	Description	Width (A)		Length (B)		Weight	
		in.	cm.	in.	cm.	lbs.	kg
4920	3/4" Safe-T-Gard™	1.51	3.84	3.74	9.5	0.45	0.204
T1002	1" Safe-T-Gard™	1.78	4.52	4.90	12.45	0.80	0.363

**IMPORTANT:** Richards products should be used in compliance with applicable federal, state and local laws and regulations. Product selection should be based on physical specifications and limitations and compatibility with the environment and materials to be handled. Richards **MAKES NO WARRANTY OF FITNESS FOR A PARTICULAR USE.** All illustrations and specifications in this literature are based on the latest product information available at the time of publication. Richards reserves the right to make changes at any time in prices, materials, specifications and models and to discontinue models without notice or obligation.