

RICHARDS 930 (3/4") RECONNECTABLE BREAKAWAY

930 3/4" Reusable "Re-Snap" Safe-T-Gard™ Breakaway

The Richards 930 Safe-T-Gard™ breakaway is designed to be lightweight, easy to resnap and break at or under 350 pounds pull. The 930 has a tough and enduring sleeve to protect against damage due to a drive away, meeting U.L. "567" requirements.

For proper operation on high-hanging hoses, the Richards 930 3/4" must always be installed with a "straightening" hose with a minimum length of 9". For low-hose applications, the Richards 930 should be installed downstream of the retractor cable.



Features:

- ◆ Pull force - the 930 will break away with a pull force of no more than 350 lbs.
- ◆ Super Flow Rate
- ◆ Advanced Snap-Back Spring Mechanism
- ◆ Easy to Snap Back
- ◆ Minimal Down Time
- ◆ No Repair Kit Needed
- ◆ Can Be Used Repeatedly
- ◆ Valve Protectant
- ◆ Lightweight - 7 ounces
- ◆ Small in Size - 3 3/4" in Height
- ◆ Listed by Underwriters Laboratories, Inc.



Materials

- Body: aluminum
- Protective Sleeves: nylon, HDPE
- Main Seals: Viton®
- Main Spring: stainless steel
- Guide and Poppets: aluminum

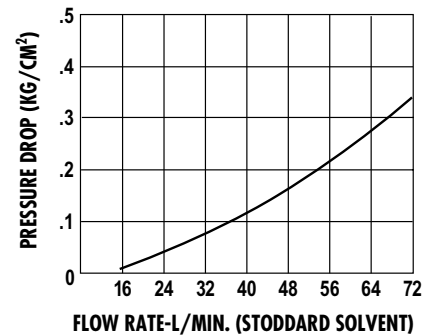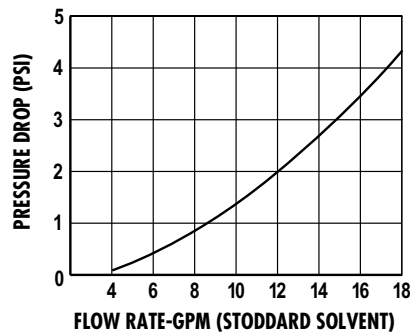

Ordering Specifications

Product #	Size	Weight	
		lbs.	kg.
4930	3/4" (NPT)	1.2	.54

Dimensions

Product #	Width		Length	
	in.	mm.	in.	mm.
4930	2 1/2"	64	4 1/2"	114

IMPORTANT: Richards products should be used in compliance with applicable federal, state and local laws and regulations. Product selection should be based on physical specifications and limitations and compatibility with the environment and materials to be handled. Richards MAKES NO WARRANTY OF FITNESS FOR A PARTICULAR USE. All illustrations and specifications in this literature are based on the latest product information available at the time of publication. Richards reserves the right to make changes at any time in prices, materials, specifications and models and to discontinue models without notice or obligation.