
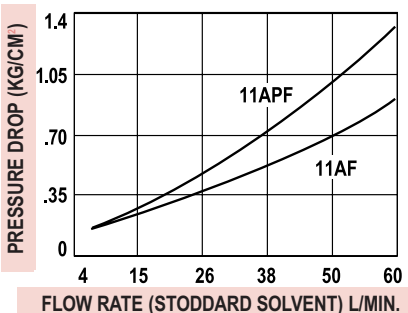


## FOR FARM USAGE - NOT FOR COMMERCIAL USAGE

OPW 11AF® nozzles are designed with today's customer in mind. Small, trim, lightweight, easy and convenient, the OPW 11AF® is a rugged performer that offers long life and reliable service.

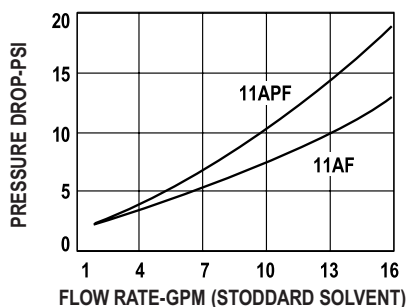


### WARNING

Do not use OPW 11AF® Nozzles for any service station application. Its intended use is for non-commercial applications only! Use of foreign objects to hold open automatic nozzles could result in failure to shut off and personal injury.



**Body:** aluminum  
**Lever & Lever Guard:** Duratuff®  
**Packing:** Graphite with Teflon®  
**Disc:** Viton®  
**Spouts:** aluminum  
**Inlet size:** 3/4" NPT  
**Weight:** 2.85 lbs. each, 44.90 lbs./ case of 15  
 1.3kg each, 20.4kg/ case of 15

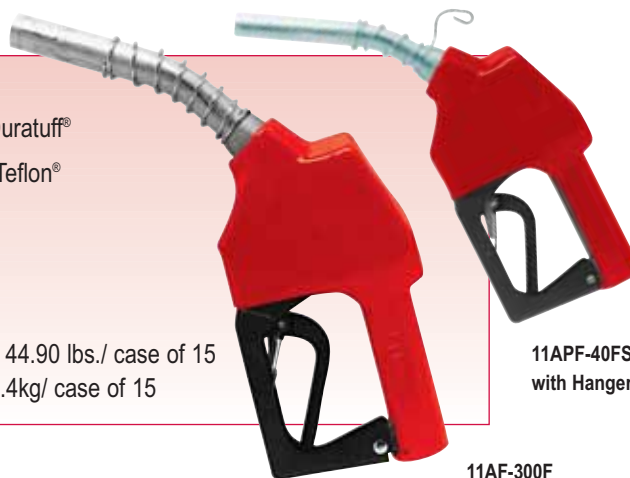

11APF-40FS with Hanger

11AF-300F

### Features

- ◆ **“Accu-Stop” flow control** - allows your customers to top off their tanks to the exact amount...easy to stop gasoline flow precisely.
- ◆ **Low-profile aluminum body** - lightweight, easier to handle, provides an attractive, image-enhancing appearance.
- ◆ **Full hand insulator** - protects both nozzle and vehicle and insulates user's hand.
- ◆ **Hold-open rack is standard for one-hand control** - means easy setting to flow rate for customer convenience.
- ◆ **Easily-replaced spout** - simply remove the spout-retaining screw. Replacement provides an entirely new outlet check valve. Kits are available from OPW.
- ◆ **Duratuff® lever and lever guard** - for additional durability to protect against rough handling.
- ◆ **Blocker on lever guard** - to help prevent the nozzle from being jammed into the open position with a foreign object.
- ◆ **Listed by Underwriters Laboratories, Inc.** - for gasoline, 15% ethanol, methanol and gasoline blends. UL & ULC Listed. Visit our website at: opw-fc.com for specific listings.
- ◆ **Exclusive two-stage lever assembly** - provides a positive shut-off, even if still being held in wide-open position by the user.
- ◆ **Design working pressure** - OPW products are designed to work at 50 PSI (3.45 bar) maximum pressure.

### Ordering Specifications

Full Hand Insulator Color	Hanger with spring, hold-open rack & trigger		Standard spring hold-open rack & trigger	
	For Unleaded Service 1 1/2" O.D. Spout	For Leaded and Diesel Service 1 1/2" O.D. Spout	For Unleaded Service 1 1/2" O.D. Spout	For Leaded and Diesel Service 1 1/2" O.D. Spout
Green		11AF-10FS		
Red	11APF-30FS		11APF-300F	11AF-300F
Black	11APF-40FS	11AF-40FS		

### Replacement Spout Kits

Product #	O.D.		Length		Weight		Used On
	in.	mm	in.	mm	lbs.	kg	
5BF-0112	1 5/16"	24	7"	178	.59	.27	11AF-No Hook
5BFS-0113	1 5/16"	24	7"	178	.59	.27	11AF w/ Farm Hook
5BPF-0172	1 3/16"	21	7"	178	.59	.27	11APF-No Hook
5BPFS-0173	1 3/16"	21	7"	178	.59	.27	11APF w/ Farm Hook

### Listings and Certifications



NOTE: See OPW's Website at: [www.opw-fc.com](http://www.opw-fc.com) for product instruction sheets, trouble-shooting guides, how-to-use guide and to view the Do's & Don'ts at the Gas Pump video.

Mascott Equipment Co

Portland

Seattle

Pasco

(800) 452-5019

(800) 481-7311

(888) 450-7867