


## Features

- Square, formed and welded aluminum housing.
- Extruded aluminum door gasketed to housing. Concealed hinge door secured with captive screw. Optional quick-release latch for ground serviceability. Drop pattern acrylic lens provides symmetric light pattern.
- Specular, anodized aluminum reflector panels for vertical lamp provide high-performance.
- Ceiling mount provided with bolt and wiring holes in housing top.
- Mogul porcelain socket, pulse rated with spring-loaded, nickel-plated center contact and reinforced lamp grip screw shell.
- CWA type ballast, HPF, starting rated at -20°F (-40°F for HPS).
- TGIC thermoset polyester powder paint finish with choice of two standard colors. Consult factory for other colors.
- UL and CSA listed for wet locations.



Square, vertical lamp luminaire for canopies, parking garages, walkways, entrances, auto service departments and loading docks.

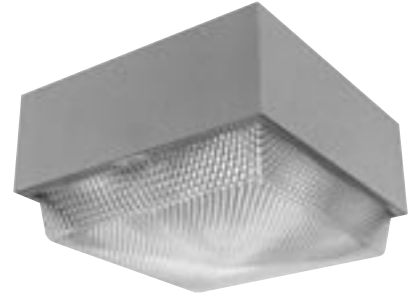

CANOPY

## Ordering Information

**Example:** ① VN - ② A - ③ CM - ④ H40 - ⑤ HP - ⑥ DG - ⑦ Q - ⑧ WH - ⑨ QR - L

Series      Housing      Mounting      Lamp/Watt.      Lamp Orient./Ref.      Lens      Voltage      Color      Options

### ① Series

VN = Vision

### ② Housing Material

A = Formed Aluminum

### ③ Mounting

CM = Ceiling Mount

### ④ Lamp Type/Wattage

Metal Halide

H25

H40

Super Metal Halide

MS25

MS40

Pulse Start

P25

P32

P35

P40

### ⑤ Lamp Orient./Reflector

HP = Vertical Lamp High-Performance Reflector (standard)

### ⑥ Lens

DG = Drop Glass\*

DA = Drop Acrylic

\* not available with QR option.

### ⑦ Voltage

Q = Quad-Tap

5 = 480V

T = Tri-Tap

### ⑧ Color

Standard:

WH = White

DB = Dark Bronze

Custom Color:

Consult Factory

### ⑨ Options

L = Lamp (included)

QZ = Quartz

QR = Quick Release Latch

Fuse

F1 = 120V

F2 = 208V

F3 = 240V

F4 = 277V

F5 = 480V

F6 = 347V

## Dimensions

	A	B	Wt./Lbs.
VN	21.12"	13"	40

